

# GRIP TIGHT® REVERSE PRESSURE

Test Plug

Eliminate concerns over inadequate joint strength when pressure testing welded flange connections




3/4" - 6" (DN20 - DN150) GTRP

Previous flange weld testing devices have been shown to apply only radial and hoop stresses to the weld location. Use of these devices for pressure testing will not adequately test or verify the axial strength of the flange-to-pipe weld.

EST Group's new GripTight Reverse Pressure (GTRP) test plugs are the solution to the growing concern over the axial strength of flange-to-pipe welds. By isolating the test area between a test flange and our GTRP plug, the flange-to-pipe weld is subjected to the full axial, hoop, and radial stresses equivalent to the stresses that would be produced when using a test blind to pressurize the entire piping system. Pressure testing using EST Group's GTRP can effectively verify the weld integrity providing the user confidence that the flange and weld will properly function when placed into service.

Pressure testing flange-to-pipe welds with EST Group's GTRP eliminates the need to blind, fill, and pressurize the entire piping system, which in turn reduces the need to properly handle and dispose of potentially contaminated test fluids. Testing performed with the GTRP is quick, easy, and safe and meets the requirements of ASME/ANSI B16.5.

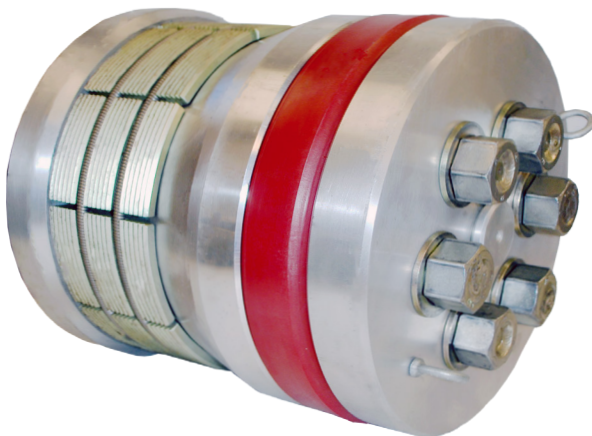

8" - 24" (DN200 - DN600) GTRP

Our standard GTRP plugs allow testing to pressures up to 2,250 PsiG (155 BarG), which covers up to ANSI 600# class service. Plugs are available in sizes 3/4" to 12" (DN20 - DN300), additional plug sizes and higher test pressures available upon request.


The only plugs manufactured under a QA program certified to ISO-9001

Can be supplied under ANSI N45.2, 10CFR50 Appendix B.

**CURTISS  
WRIGHT**  
Flow Control Company  
EST Group

Pipe Size	Part Number	Schedule	Nominal Pipe I.D. inches (mm)	Plug O.D. inches (mm)	I.D. Range inches (mm)	Maximum Test Pressure PsiG (BarG)	L1 inches (mm)	Approximate Plug Weight lbs (kg)
3/4"	GTRP-75P80	80	0.74 (18.8)	0.65 (16.5)	0.72 - 0.75 (18.3 - 19.1)	2250 (155)	18 3/4 (476.3)	1.5 (0.7)
	GTRP 75P40	40	0.82 (20.8)	0.72 (18.3)	0.81 - 0.83 (20.6 - 21.1)	2250 (155)	18 3/4 (476.3)	1.5 (0.7)
1"	GTRP-1P80	80	0.96 (24.4)	0.84 (21.3)	0.93 - 1.00 (23.6 - 25.4)	2250 (155)	18 3/4 (476.3)	1.5 (0.7)
	GTRP-1P40	40	1.05 (26.7)	0.93 (23.6)	1.01 - 1.09 (25.7 - 27.7)	2250 (155)	18 3/4 (476.3)	1.5 (0.7)
1 1/2"	GTRP-15P80	80	1.50 (38.1)	1.35 (34.3)	1.47 - 1.61 (37.3 - 40.9)	2250 (155)	18 3/4 (476.3)	4 (2.0)
	GTRP-15P40	40	1.61 (40.9)	1.46 (37.1)	1.58 - 1.66 (40.1 - 42.2)	2250 (155)	18 3/4 (476.3)	4 (2.0)
2"	GTRP-2P80	80	1.94 (49.3)	1.69 (42.9)	1.91 - 1.99 (48.5 - 50.5)	2250 (155)	8 7/8" (225.4)	5 (2.3)
	GTRP-2P40	40	2.07(52.6)	1.82 (46.2)	2.04 - 2.13 (51.8 - 53.8)	2250 (155)	8 7/8" (225.4)	5 (2.3)
2 1/2"	GTRP-25P80	80	2.32 (58.9)	2.07 (52.6)	2.27 - 2.45 (57.7 - 62.2)	2250 (155)	10" (254.0)	9 (4.1)
	GTRP-25P40	40	2.47 (62.7)	2.22 (56.4)	2.44 - 2.54 (62.0 - 64.5)	2250 (155)	10" (254.0)	9 (4.1)
3"	GTRP-3P80	80	2.90 (73.7)	2.52 (64.0)	2.87 - 2.98 (72.9 - 75.7)	2250 (155)	13 5/8" (346.1)	12 (5.4)
	GTRP-3P40	40	3.07 (78.0)	2.69 (68.3)	3.04 - 3.14 (77.2 - 79.8)	2250 (155)	13 5/8" (346.1)	12 (5.4)
4"	GTRP-4P80	80	3.83 (97.3)	3.39 (86.1)	3.80 - 3.91 (96.5 - 99.3)	2250 (155)	13 5/8" (346.1)	22 (10.0)
	GTRP-4P40	40	4.03 (102.4)	3.59 (91.2)	4.00 - 4.11 (101.6 - 104.4)	2250 (155)	13 5/8" (346.1)	22 (10.0)
6"	GTRP-6P80	80	5.76 (146.3)	5.26 (133.6)	5.73 - 5.87 (145.5 - 149.1)	2250 (155)	20 5/8" (523.9)	50 (22.7)
	GTRP-6P40	40	6.07 (154.2)	5.57 (141.5)	6.04 - 6.17 (153.4 - 156.7)	2250 (155)	20 5/8" (523.9)	50 (22.7)
8"	GTRP-8P80	80	7.63 (193.8)	7.13 (181.1)	7.60 - 7.75 (193.0 - 196.9)	2250 (155)	10 1/2" (266.7)	50 (22.7)
	GTRP-8P40	40	7.98 (202.7)	7.48 (190.0)	7.95 - 8.10 (201.9 - 205.7)	2250 (155)	10 1/2" (266.7)	50 (22.7)
10"	GTRP-10P80	80	9.56 (242.8)	9.06 (230.1)	9.53 - 9.80 (242.1 - 248.9)	2250 (155)	11 5/8" (295.3)	75 (34.0)
	GTRP-10P40	40	10.02 (254.5)	9.52 (241.8)	9.99 - 10.21 (253.7 - 295.3)	2250 (155)	11 5/8" (295.3)	75 (34.0)
12"	GTRP-12P80	80	11.38 (289.1)	10.87 (276.1)	11.34 - 11.64 (288.0 - 295.7)	2250 (155)	12 1/4" (311.2)	100 (45.4)
	GTRP-12P40	40	11.94 (303.3)	11.50 (292.1)	11.91 - 12.19 (302.5 - 309.6)	2250 (155)	12 1/4" (311.2)	100 (45.4)

3/4" and 1" (DN20 - DN25) plugs require a modified extended flange during pressure testing.  
 1 1/2" to 6" (DN40 - DN150) plugs require EST Group manufactured installation equipment.  
 8" to 12" (DN200 - DN300) plugs have a multi-shaft design. (May be installed utilizing standard sockets and socket extensions.)  
 Modified blind flange with and without lanyard are available for purchase separately.  
 Contact EST Group for more details.

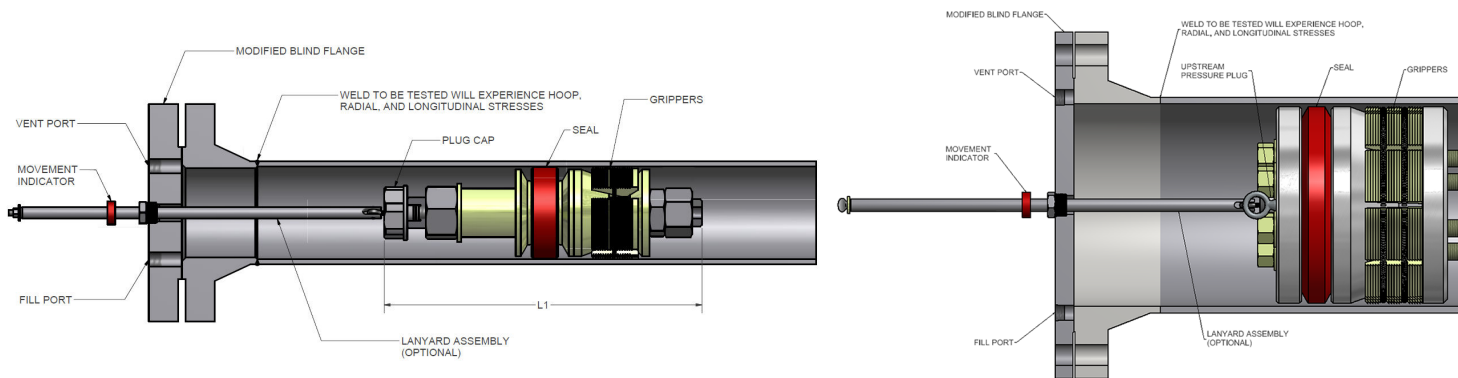

\*GripTight® Reverse Pressure plugs have been designed and tested to be safe and fully functional without the use of a lanyard. The lanyard does not prevent the plug from moving downstream, but instead offers a visual indication of undesired plug movement that could occur if the plug is not properly installed. Undesired plug movement can also be detected by monitoring the application of pressure during pressure testing. Note that the lanyard assembly works in conjunction with an EST supplied blind flange. If the optional lanyard assembly is not used, the customer can supply a blind flange for testing or EST can supply one. The blind flange will need to have fill and vent ports to properly pressure test flange-to-pipe welds.

**North America / Central & South America**  
 Corporate Office  
 2701 Township Line Rd  
 Hatfield, PA 19440-1770 USA  
 (P) +1 215.721.1100  
 +1 800.355.7044  
 (F) +1 215.721.1101  
 est-info@curtisswright.com  
 http://estgroup.cwfc.com

**Europe / Middle East / Africa**  
 EST Group B.V.  
 Hoorn 312a  
 2404 HL, Alphen aan den Rijn  
 The Netherlands  
 (P) +31.172.418841  
 (F) +31.172.418849  
 est-emea@curtisswright.com

**Asia Pacific**  
 EST Group Asia  
 35 Tannery Rd, #11-10 Tannery Block  
 Ruby Industrial Complex  
 Singapore 347740  
 (P) +65.6745.8560  
 (F) +65.6742.8700  
 est-asia@curtisswright.com

